GROUP AO3LICENSESPLATE RECOGNITION ANPR 29 12 IP-CAMERA APPLICATION 12-D

Hanwha

Manage traffic access with serverless solution on Hanwha Techwin cameras

Features:



Easy to configure



Up to km/h

Camera - to - camera interaction up to 4 devices

>95%
Recognition accuracy

HIGH PERFORMANCE CAMERA APPLICATION



Distributed **DATABASE**

API for Data Integration



Convenient **WEB** interface

Highlights:




Master/Node architecture



Black/white list up to 1000 entities remote connection, analytics



No PC needed

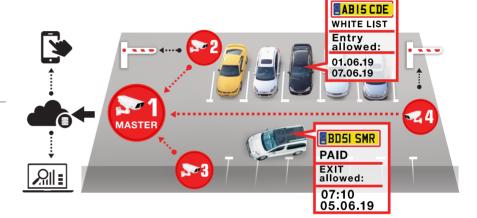

Supported cameras:









Scopes:

- Residential Area
- Parking
- SMB & SOHO







Scene Requirements:



License plate is more than 130 px in width



License plate is readable



Vertical angle is less than 30°



Horizontal angle is no more than 30°



Tilt angle is less than 5°

JAN	HAZLBAUER
Project Manager	

OLEKSII TSVIETNOV Chief Technical Officer ALEXANDRA PLAKHOTA Head of Sales

j.hazlbauer@ff-group.org

o.tsvietnov@ff-group.org

o.plakhota @ ff-group.org

Tel: +420 608 177 343

Tel: +38 098 300 89 00

Tel: +38 095 155 77 77

